FIG. 1A

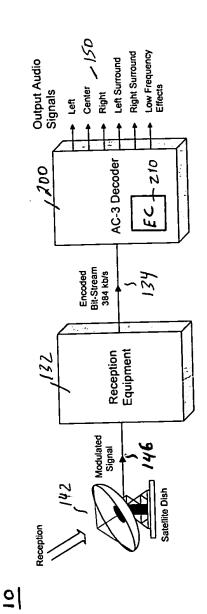
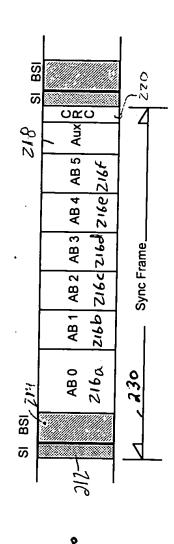


FIG. 1B

의



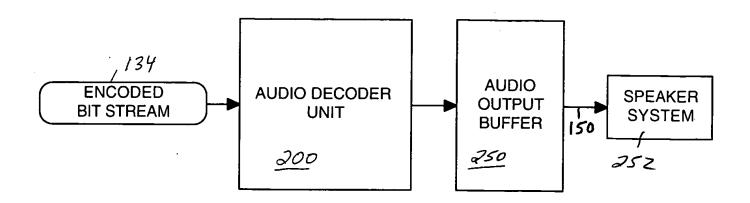


FIG. 3A

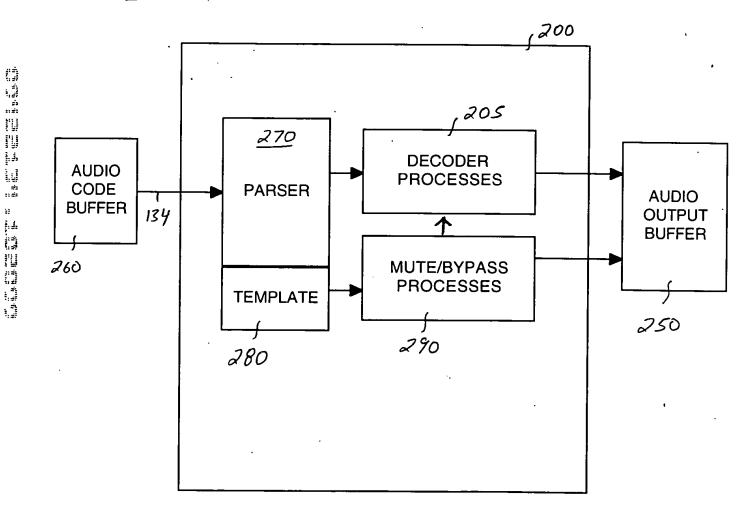


FIG. 3B

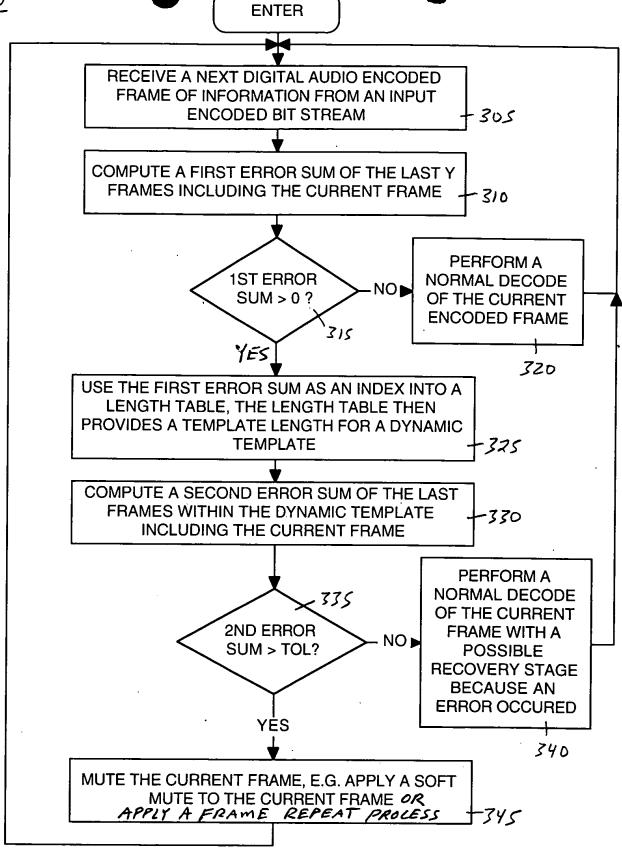
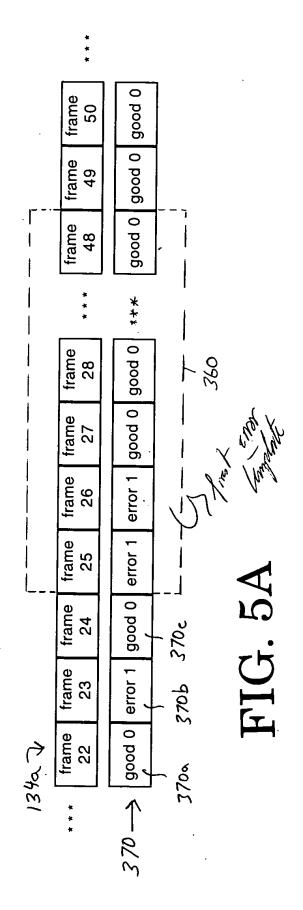


FIG. 4





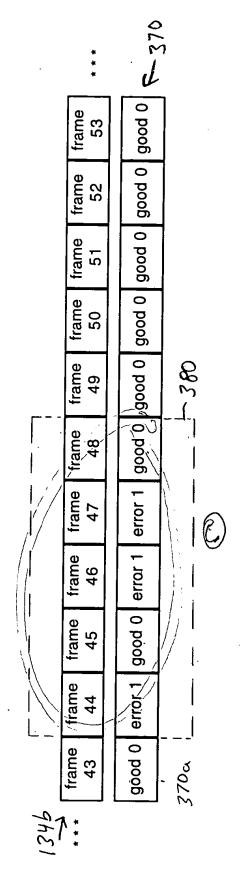


FIG. 5B

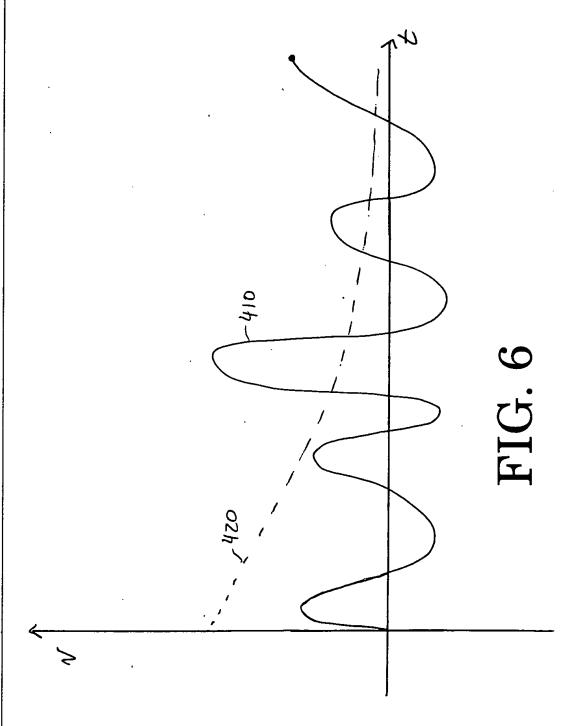

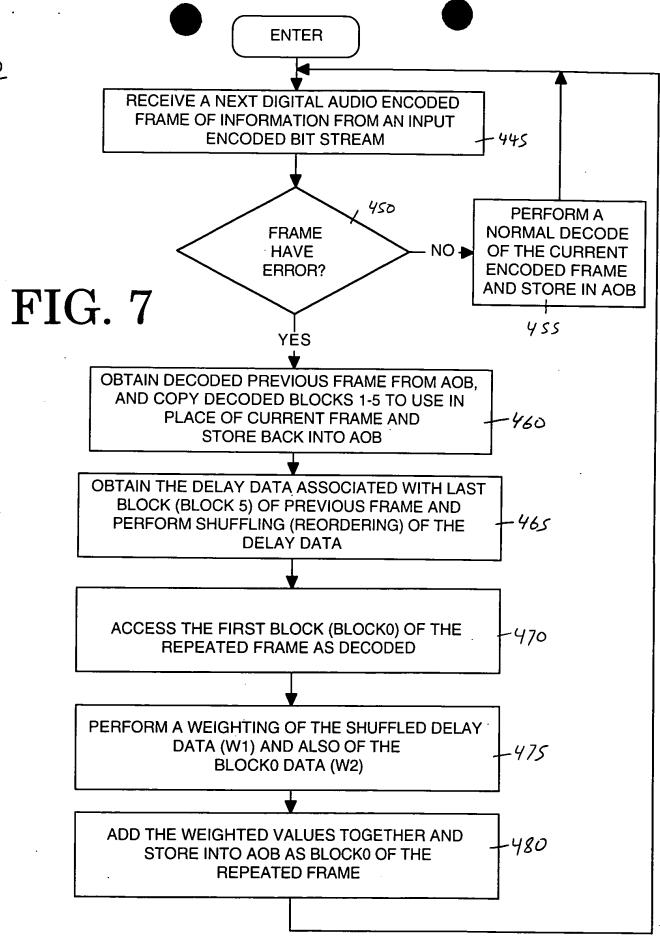

No. 5505
Engineer's Computation Pad



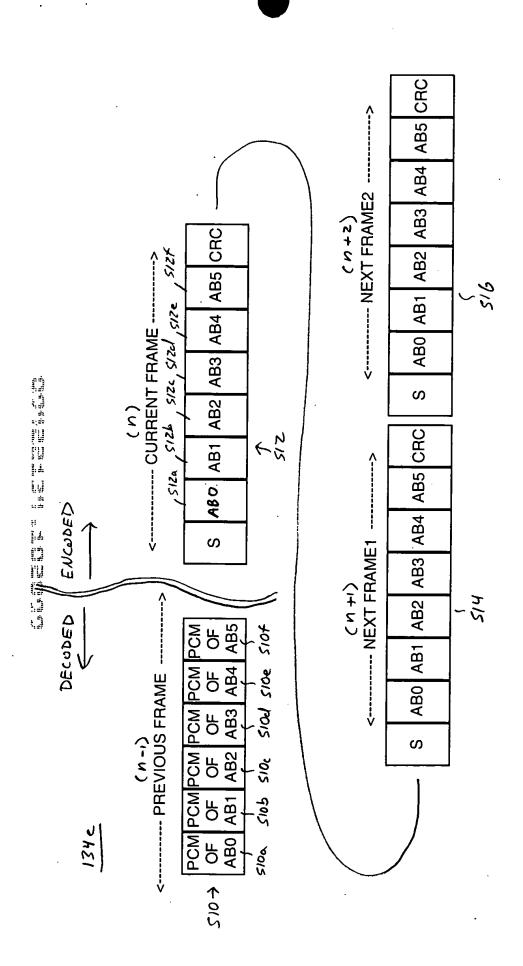


FIG. 8

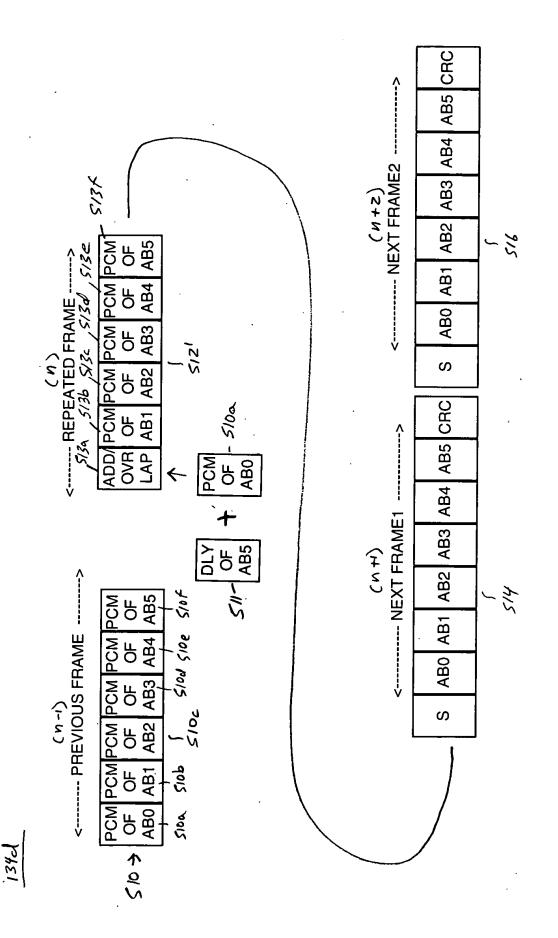


FIG. 9

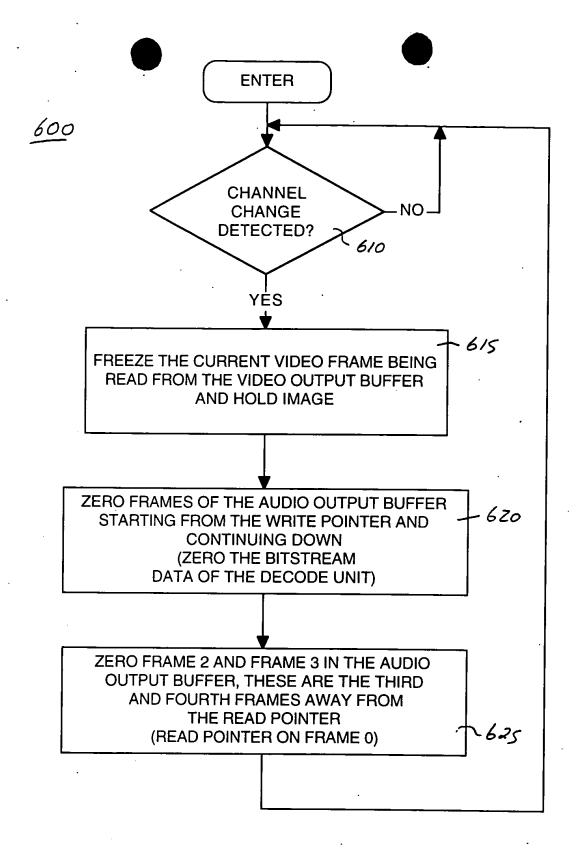


FIG. 10

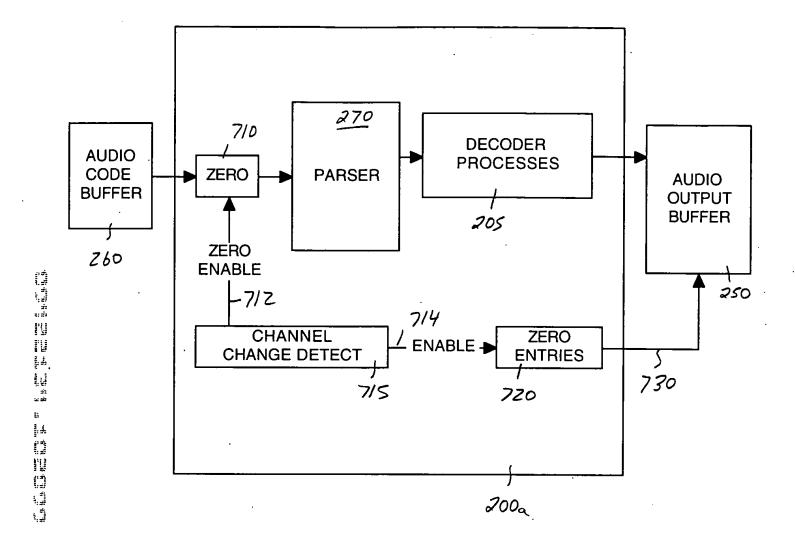


FIG. 11

Charact Go. J. D.	Cultering New Pointer (The data from this buffer will be sent to audio DAC's)		Current Write Pointer (PCM data from audio decoder is copied here)					
092	-250	7050-	7052	pose +	-250e	705C	£050-	
	0	1	l		1	5		
	FRAME	FRAME	FRAME 2	FRAME 3	FRAME 4	FRAME S	FRAME, 6	
!								

FIG. 12

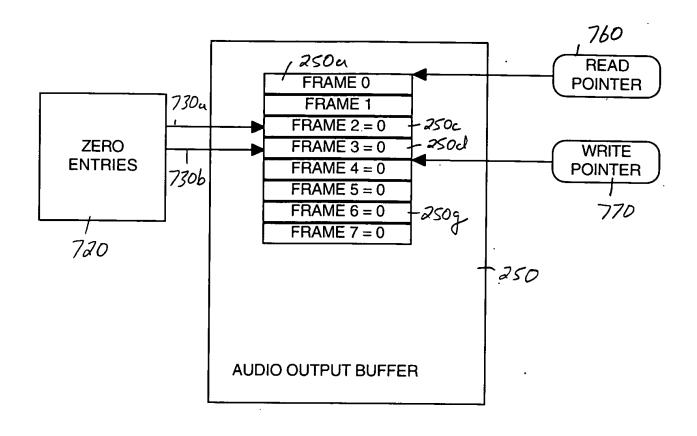


FIG. 13

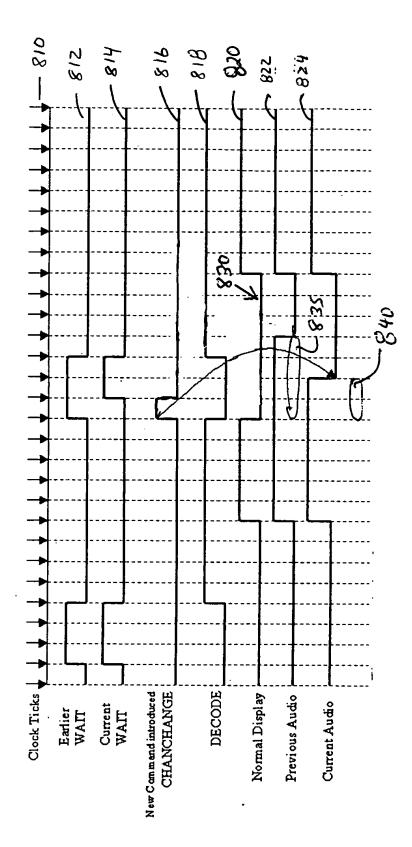


FIG. 14

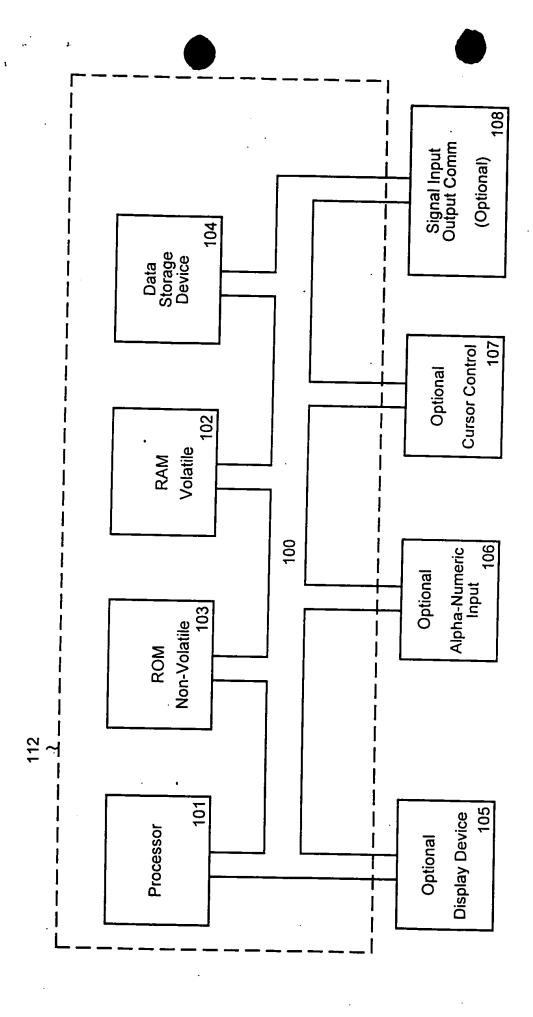


FIG. 15